RELIABLE
VALVES & PNEUMATICS

PNEUMATICS, HYDRAULIC, VALVES, PIPE-FITTING & ENGINEERING GOODS

Your Solution Partner in Industrial Valve Automation...

RVP®

RVP
RELIABLE VALVES & PNEUMATICS







COMPANY PROFILE

MANUAL VALVES

GATE VALVE



MOC : Cast Steel (WCB),
Stainless Steel (CF8, CF8M, CF3,CF3M)
Alloy Steel, Cast Iron (FG 260)
Mfg. Std. :- API 600 / BS 1414
Insp & Testing Std : API 598
Operation : Wheel Optd. / Gear Optd. /
Electrical Actuator Optd.
End Connection : Flanged End / Buttweld End
Size : ½" to 24" (15 mm to 600 mm)
Class 150# / 300# / 600# / 900#

BALLVALVE



MOC (Body/Side Piece): Cast Steel (WCB),
Stainless Steel (CF8, CF8M, CF3,CF3M)
Ball : CF8,CF8M,CF3M
Mfg. Std. :- BS 5351
Insp & Testing Std : BS 6755 / BS EN 12266-1
Design : Single Piece, Two Piece, Three Piece
Operation : Lever Optd. / Gear Optd.
End Connection :Screwed / Socket /
Flanged End
Size : ½" to 14" (15 mm to 350 mm)
Class 150# / 300# / 600# / 900#

GLOBEVALVE



MOC : Cast Steel (WCB),
Stainless Steel (CF8, CF8M, CF3,CF3M)
Alloy Steel, Cast Iron (FG 260)
Mfg. Std. :- BS 1873
Insp & Testing Std : BS 6755
Operation : Wheel Optd. / Gear Optd. /
Electrical Actuator Optd.
End Connection : Flanged End / Buttweld End
Size : ½" to 24" (15 mm to 600 mm)
Class 150# / 300# / 600# / 900#

BUTTERFLYVALVE



BODY : CI (FG260) / CAST STEEL (WCB)
Stainless Steel (CF8, CF8M, CF3,CF3M)
DISC : S.G.Iron / S.S (CF8, CF8M, CF3,CF3M)
Mfg. Std. :- BS 5155 / API 609
Insp & Testing Std : API 598
Operation : Lever Optd. / Gear Optd. /
End Connection : Wafer Type to
Suit Flanges as per 150#,Table D, E & F
/ Double Flanged Type
Size : 1½" to 24" (40 mm to 600 mm)
Lining : Nitrile / EPDM / PTFE / VITON
Rating : PN10,PN16

CHECKVALVE



MOC : Cast Steel (WCB),
Stainless Steel (CF8, CF8M, CF3,CF3M)
Alloy Steel, Cast Iron (FG 260)
Mfg. Std. :- BS 1868
Insp & Testing Std : BS 6755
End Connection : Flanged End /
Buttweld End
Size : ½" to 24" (15 mm to 600 mm)
Class 150# / 300# / 600# / 900#

"Y" TYPE STRAINER



MOC: CAST IRON (FG 260) /CS
(WCB) / SS304 / SS316
MESH: S.S.304 / S.S.316
END CONNECTION: FLANGED END
TO ANSI B16.5 FF/ RF / BS 10 TABLE 'E'
SIZE: 1" TO 14" (25mm TO 350mm)
WORKING PRESSURE: 16 BAR

INDUSTRIAL VALVES



PNEUMATIC VALVES

PNEUMATICACTUATOROPEDBALLVALVE



ACTUATOR	: SINGLE / DOUBLE ACTING
SIZE RANGE	: 1/2" TO 12"
BALL VALVE	: 3 PIECE DESIGN
MOC	: CF8 / CF8M / WCB C.S / PP
ENDS	: FLANGED / SCREWED SOCKET WELD

PNEUMATICANGLETYPECONTROLVALVE



TYPE	: NORMALLY CLOSE / OPEN
SIZE RANGE	: 1/2" TO 3"
BODY	: CF8 / CF8M
PNEU. PRESS.	: 3.5 TO 7 BAR
WORKING PRESS.	: UPTO 16 BAR
WORKING TEMP.	: 180 ℃
ENDS	: SCREWED / FLANGED
MEDIA	: AIR, WATER, OIL, GAS STEAM & CHEMICALS

PNEUMATICACTUATOROPEDBUTTERFLYVALVE



ACTUATOR	: SINGLE / DOUBLE ACTING
SIZE RANGE	: 1.1/2" TO 20"
VALVE BODY	: CAST IRON
DISC	: SG IRON / CF8 / CF8M
SEALS	: NITRILE
PRESSURE RATING	: PN 16 (MAX.)
OPER.TEMP.RANGE	: 80°C

3WAYPNEUMATICCONTROLVALVE



TYPE	: NORMALLY CLOSE / OPEN
SIZE RANGE	: 1/2" TO 2"
BODY	: CF8 / CF8M
PNEU. PRESS.	: 3.5 TO 7 BAR
WORKING PRESS.	: UPTO 42 BAR
WORKING TEMP.	: 180 ℃
ENDS	: SCREWED / FLANGED
MEDIA	: AIR, WATER, OIL, GAS STEAM & CHEMICALS

PNEUMATICACTUATOROPEDOFF-SETDISCBUTTERFLYVALVE



ACTUATOR	: SINGLE / DOUBLE ACTING
SIZE RANGE	: 1.1/2" TO 20"
VALVE BODY	: CAST IRON
DISC	: SG IRON / CF8 / CF8M
SEALS	: NITRILE
PRESSURE RATING	: PN 16 (MAX.)
OPER.TEMP.RANGE	: 80°C

2/2&3/2WAYHIGHTHERMICFLUIDCONTROLVALVE



OPERATION	: DIAPHRAGM TYPE / CYLINDER
TYPE	: DIAPHRAGM TYPE THERMIC FLUID CONTROL VALVE
SIZE RANGE	: 1" TO 8"
BODY & END PIECE	: WCB / S.S.
DIAPHRAGM	: NITRILE CANVAS MOULDED
DIAPHRAGM COVER	: SHEET, METAL, PRESSING
WORKING PRESS.	: 150#
WORKING TEMP.	: UPTO 450 ℃
SEATING	: METAL TO METAL
MEDIA	: THERMIC FLUID

PNEUMATIC VALVES



MOTORIZED VALVES

ELECTRICALACTUATOROPEDBALLVALVE



ACTUATOR : SINGLE PHASE / THREE PHASE
SIZE RANGE : 1/2" TO 12"
BALL VALVE : 3 PIECE DESIGN
MOC : CF8 / CF8M / WCB
C.S / PP
VOLTAG : 230V, 220V, 110V, 24V
ENDS : FLANGED / SCREWED
SOCKET WELD

ELECTRICALACTUATOROPEDBUTTERFLYVALVE



ACTUATOR : SINGLE PHASE / THREE PHASE
SIZE RANGE : 1.1/2" TO 20"
VALVE BODY : CAST IRON
DISC : SG IRON / CF8 / CF8M
SEALS : NITRILE
VOLTAG : 230V, 220V, 110V, 24V
PRESSURE RATING : PN 16 (MAX.)
OPER.TEMP.RANGE : 80°C

ELECTRICALACTUATOROPEDOFF-SETDISCBUTTERFLYVALVE




MODEL : MBFV
ACTUATOR : SINGLE / DOUBLE ACTING
SIZE RANGE : 1.1/2" TO 20"
VALVE BODY : CAST IRON
DISC : SG IRON / CF8 / CF8M
SEALS : NITRILE
VOLTAG : 230V, 220V, 110V, 24V
PRESSURE RATING : PN 16 (MAX.)
OPER.TEMP.RANGE : 80°C

PRODUCTGALLERY





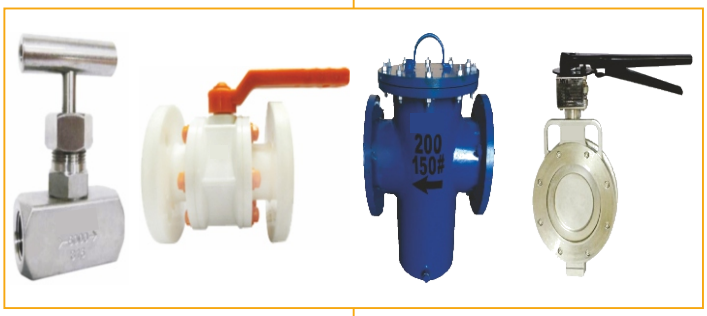



MOTORIZED VALVES





RELIABLE
VALVES & PNEUMATICS
PNEUMATICS, HYDRAULIC, VALVES, PIPE-FITTING & ENGINEERING GOODS

Your Solution Partner in
Industrial Valve Automation...

RVP®

RVP
RELIABLE VALVES & PNEUMATICS

Reliable House No. 682/3, Nr. Jamiya Naziriya Darul Uloom,
At Post. Kakoshi-384290, Ta. Siddhpur, Dist. Patan, (N.G.) INDIA

info@reliablevalves.co.in | sales@reliablevalves.co.in

reliablevalves88@gmail.com www.reliablevalves.co.in

099248 44465, 099248 41653, 095373 14440